

# Hip Line Media

## A SIMPLE QUILT Pattern Notes

LOOKING THRU A WINDOW  
Pattern by Ruberta Peterson

The finished quilt will be approximately 58"x48" with 25 blocks  
All seam allowances are  $\frac{1}{4}$ " unless otherwise stated.

### FABRIC:

A - $1 \frac{1}{4}$ yards	Theme Fabric
B - $\frac{1}{4}$ yard	Corners
C - $\frac{3}{4}$ yard	Frame
D - $\frac{3}{4}$ yard	Frame
E - $1 \frac{3}{4}$ yards	Lattice and binding

Backing Fabric -  $2 \frac{3}{4}$  yards


Batting - 50"x60"

### Cut:

1. Fabric A: cut 25 -  $5 \frac{1}{2}$ " by  $7 \frac{1}{2}$ " blocks
2. Fabric B: cut 2 strips 2" wide AND cut 1-  $4 \frac{1}{2}$ " by  $4 \frac{1}{2}$ " square (for borders)
3. Fabric C: cut 2 strips  $5 \frac{1}{2}$ " wide
4. Fabric D: cut 5 strips 2" wide
5. Fabric E: cut 12 strips  $1 \frac{1}{2}$ " wide

### Sew:

1. Sew the blocks of A on the  $7 \frac{1}{2}$  side to the 2" strips of D - right sides together. Cut apart and press seams to D.
2. Sew the 2" strip of B to the  $5 \frac{1}{2}$  strip of C - right sides together. Cut into 2" segments and press seams to C.
3. Sew DA to BC - right sides together. Press seams down.
4. Sew E to DB - right sides together. Cut apart and press seams out.
5. Sew E to the bottom of BC - right sides together. Cut apart and press seams down.

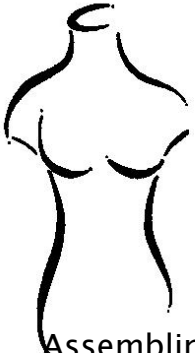

# Hip Line Media

## Assembling the Quilt:

Sew the blocks together by row then by column.  
We will have 5 rows of 5 blocks each.

## Measure the Quilt:

“True” up the finished quilt so the corners are at 90°.  
Measure from top to bottom at 2 points, each about 1/3 way in from sides.  
Cut your border pieces (below) to the appropriate length.

## Border Pieces:

1. Fabric C: cut 1 – 4 ½” wide
2. Fabric D: cut 2 – 4 ½” wide
3. Fabric E: cut 3 – 5 ½” wide

## Border:

Sew the Border pieces on - sides first, then bottom, then top. Pin the pieces to the quilt and ease where necessary. Press seams towards borders.

## Quilting:

Layer the batting between the quilt top and your backing fabric. Quilt by machine with a walking foot or by hand.

## Binding:

1. Calculate the distance around the quilt and add 12”.
2. From Fabric E, cut 2 ½” strips – approximately 5 or enough to cover distance.
3. Seam strips together, trim seams and press open.
4. Press binding in half lengthwise, wrong sides together.
5. Trim backing and batting flush with quilt top and “true” up corner to 90°.
6. Sew binding to quilt with your walking foot starting away from a corner and leaving a 10”tail. Miter the corners.
7. Finish the binding by stopping about 15” from the beginning of your stitching. Remove from machine. Slip the tails into one another, folding back any raw edges. You will need to trim the tails. Stitch down.
8. For the back, fold binding to back and stitch by hand. Corners will automatically miter.

Please visit our website for additional DVD projects and books at [www.HipLineMedia.com](http://www.HipLineMedia.com).

Copyright 2005 Hip Line Media